

4010350 00701000

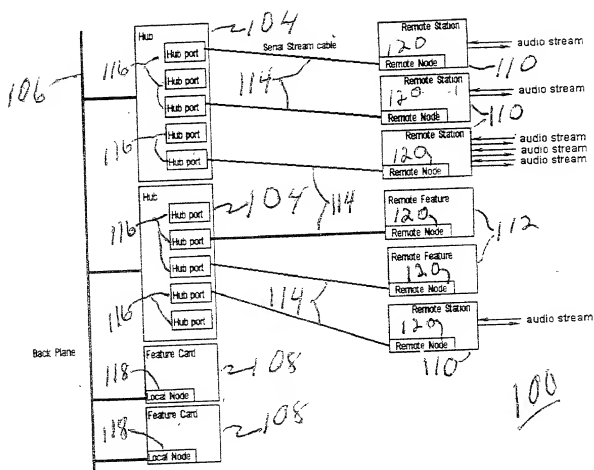


FIG. 1

FORM NO. 68701250






Fig. 2

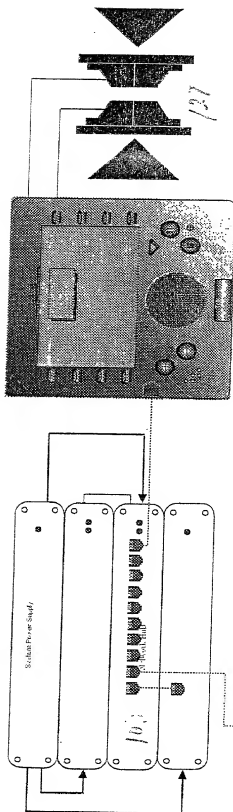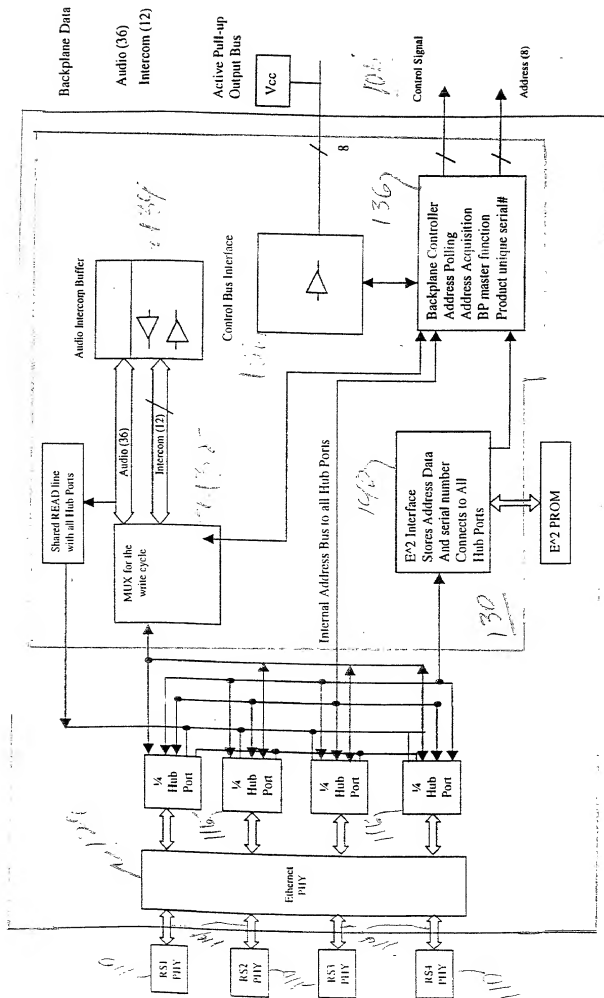

Network Timing Overview Frame N (Backplane Reference)

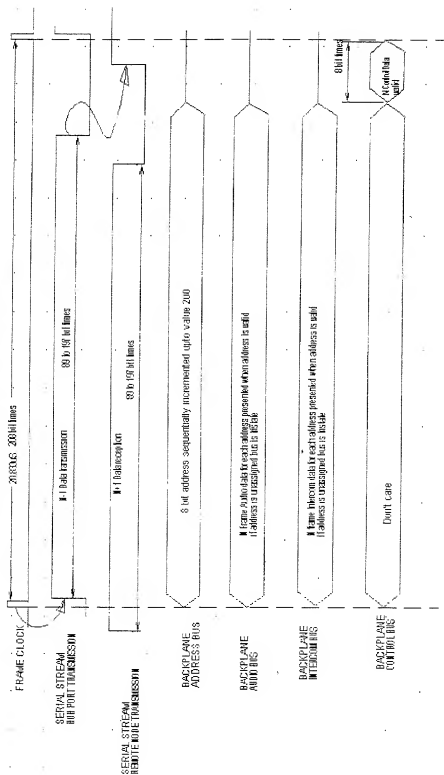


Fig. 4A

Preamble	CBS	Hub control	Data	loom	Left audio 1	Right audio 1	Left audio 2	Right audio 2	Left audio 3	Right audio 3	Left audio 4	Right audio 4
AAAAAABh	cbs	D7 HC7, HC0	D7 D0	I11 I0	A11.17 A11.0	A11.17 A11.0	A12.17 A12.0	A21.17 A21.0	A31.17 A31.0	A31.17 A31.0	A41.17 A41.0	A41.17 A41.0

Fig. 4B

[illegible]

154

Mediator Initialization Process

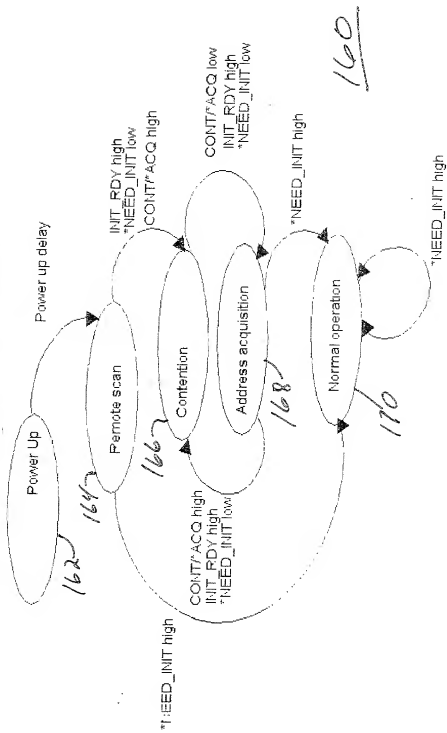


Fig. 6

Control message transmission

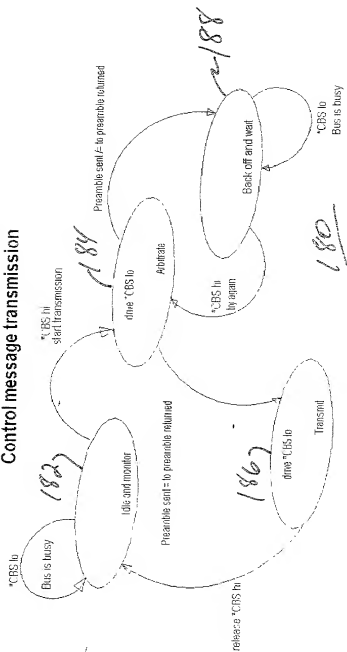
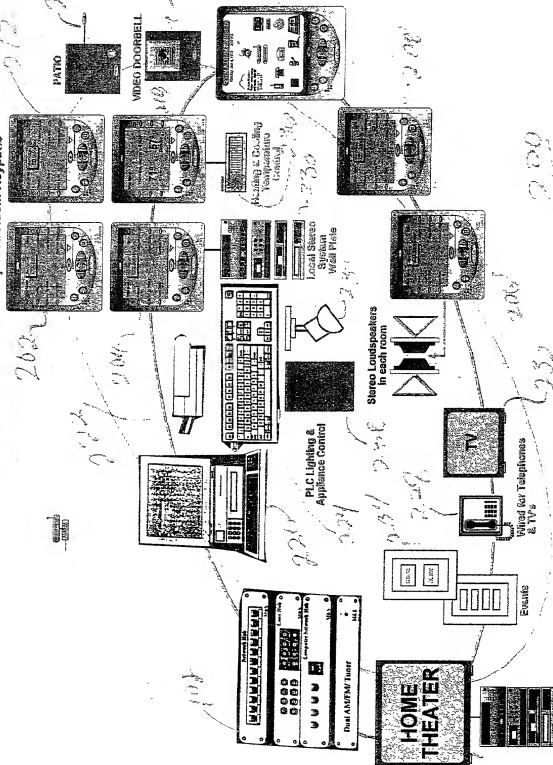


Fig. 7A

Preamble	Destination address	Source address	Number of Bytes in Payload	Payload	Checksum
10 bytes	1 byte	1 byte	2 bytes	0-65Kbytes	2 bytes

Fig. 7B

Amplified Room Keys





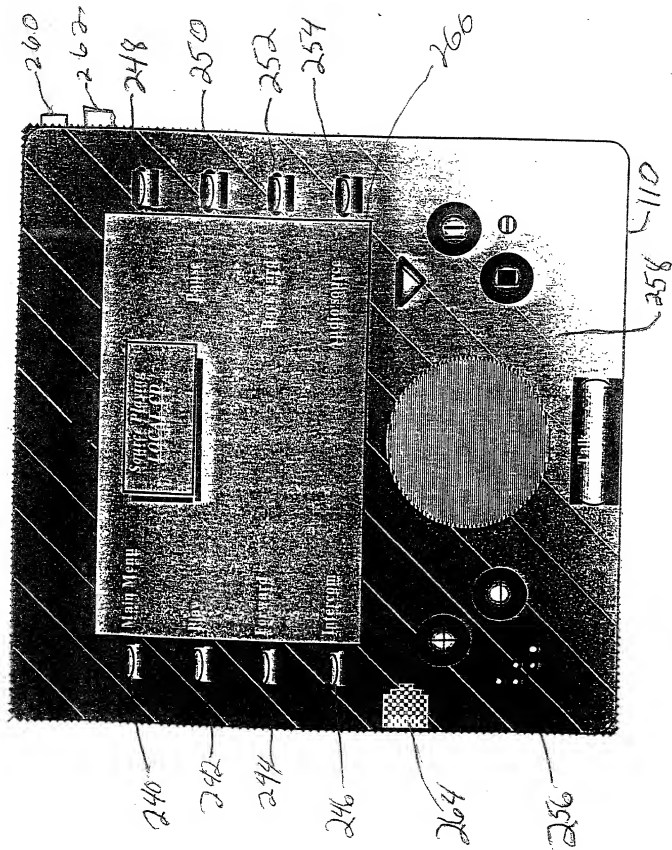


FIG. 10

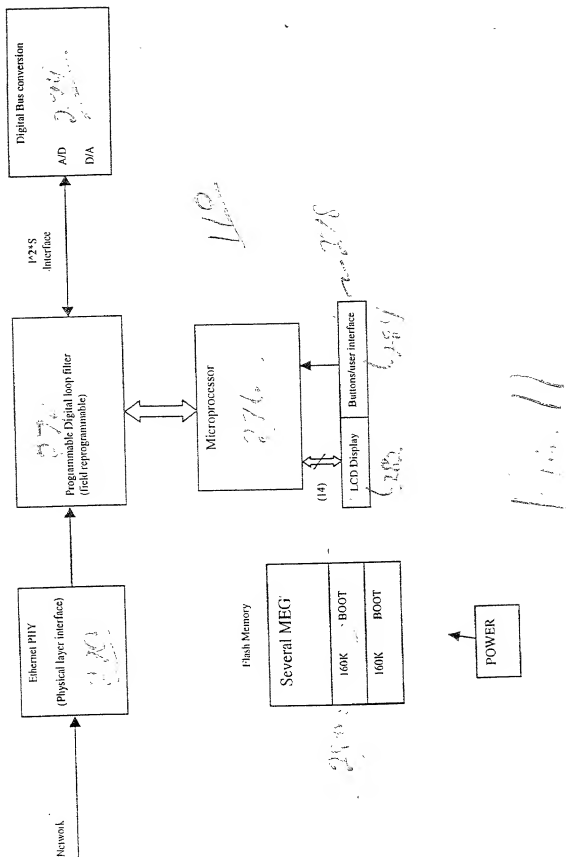

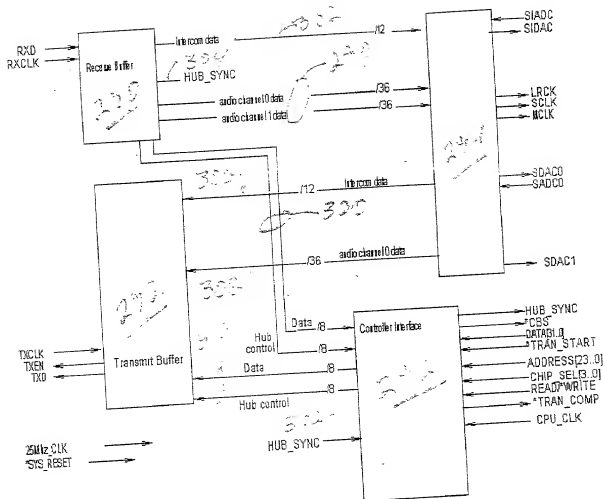

F-3.12